


# HRFT-E 系列防水防尘防腐LED泛光灯(C型)


## Series Weatherproof LED Floodlights (Type C)



Weatherproof Light Fittings  
防水防尘防腐灯具系列

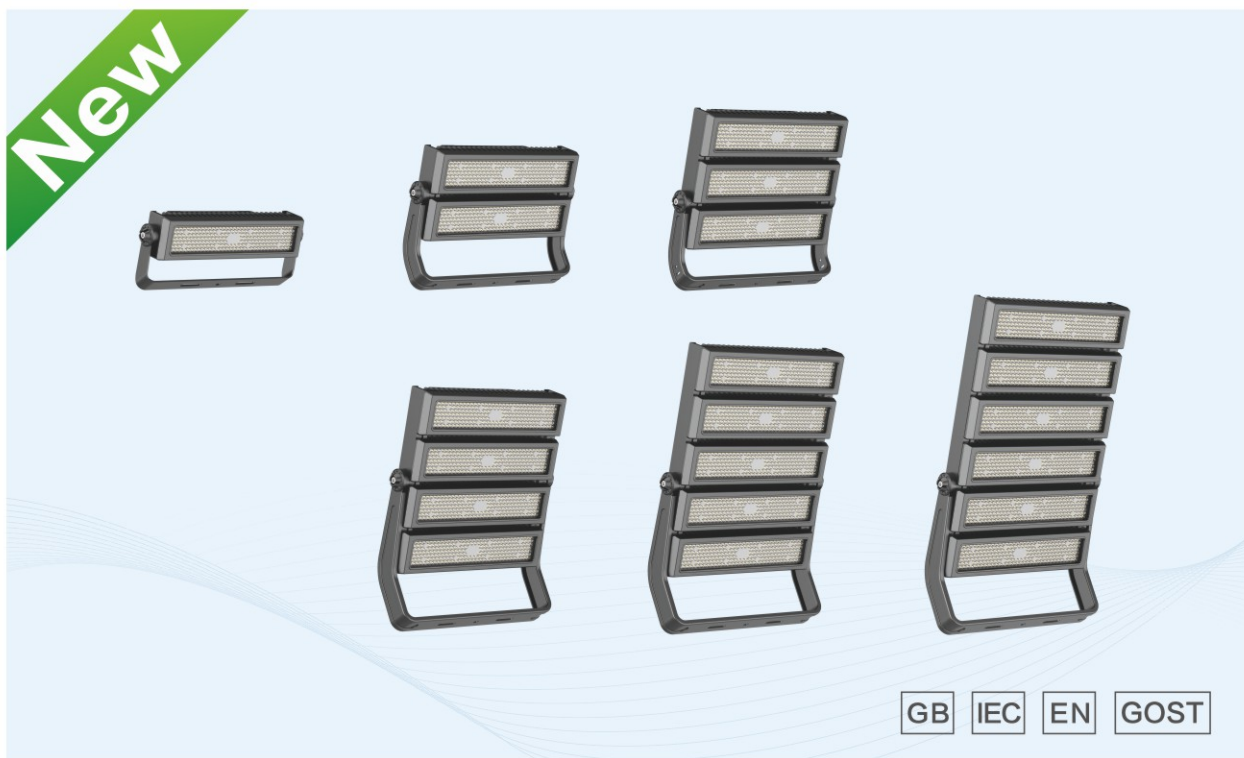

### ◆ 型号规格含义/Catalogue number logic

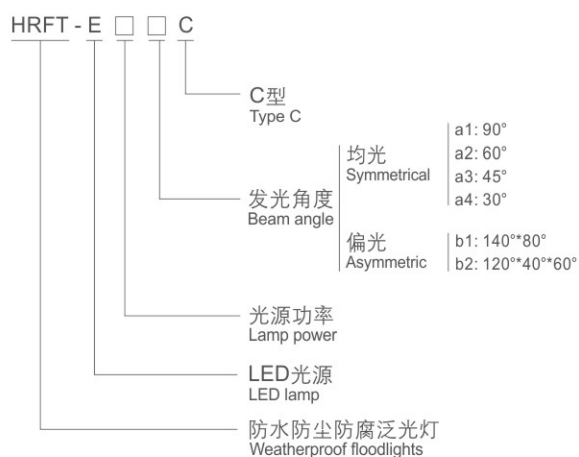

注: 均光90°为标准配置, 可不注。

Note: Symmetrical 90° is standard configuration, which can be omitted.

### ◆ 订货须知/Ordering Information

- ◇ 注明执行标准、工作电压、环境温度;
- ◇ 按照产品型号规格说明逐条选择, 例如: 需要发光角度60°的600W LED灯具, 则产品选型为HRFT-E600 a2 C;
- ◇ 本灯具出厂时光源已配。
- ◇ Specify the executive standard, working voltage, environment temperature.
- ◇ Follow the product catalogue number logic for selection. For example, if 600W floodlight LED lamps with beam angle of 60° are needed, HRFT-E600 a2 C is selected as the product type.
- ◇ The light fittings are supplied with light source when deliveries.

## ◆ 产品特点/Product features

### 坚固耐用 Solid and reliable

铝合金压铸壳体，表面高压静电喷塑。

Die-casting aluminum alloy enclosure, high-voltage electrostatic powder coated surface.

### 高效节能 High efficiency and energy saving

系统光效大于130lm/W，完美替换传统金卤灯或钠灯，节能高达60%以上。

The luminous efficiency of the system is as high as 130lm/W, which can perfectly replace the traditional metal halide lamp or sodium lamp, saving more than 60% energy.

### 功率齐全 Complete power specifications

六种壳体类型，多种功率可选，最大功率可达1200W。

Six enclosure types, multiple power options, and maximum power up to 1200W.

### 专业配光 Professional light distribution

全系列配置均光、偏光2种光学透镜，多种发光角度可选，全面覆盖各种场所应用。

All series are equipped with symmetrical and asymmetric two kinds of lens, multiple beam angle for option, full cover all kinds of places application.

### 舒适自然 Comfortable and natural

优化的配光设计，高透光率透明罩，显色性CRI高达80以上。

Optimized light distribution design, transparent cover with high light transmittance, CRI up to 80.

### 稳定长寿 Stable longevity

高性能国际品牌LED元件，高品质驱动电源，宽电压输入，恒功率输出，具备多种保护功能，确保灯具工作稳定长寿。

High-performance international brand LED components, high-quality driving power supply, wide voltage input, constant power output, with a variety of protection functions, to ensure stable and long life of lamps.



Waterproof





Dustproof





Corrosionproof

Weatherproof Light Fittings  
防水防尘防腐灯具系列



## ◆ 外形及安装举例/Outline and mounting type

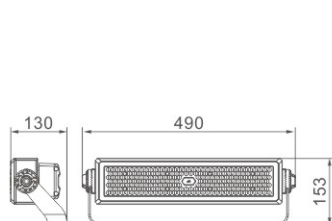



I 型/Type I

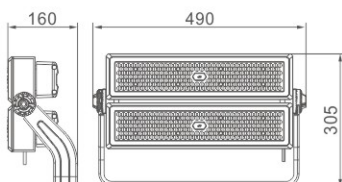



II 型/Type II

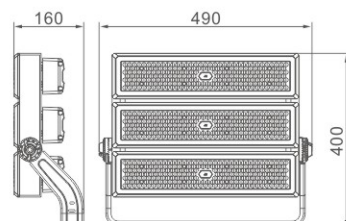



III 型/Type III

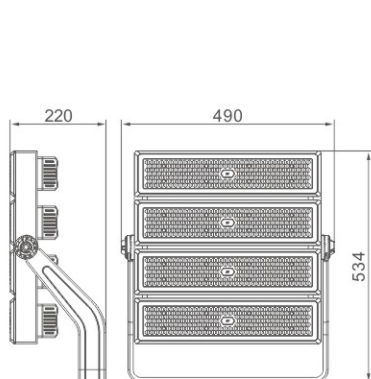

IV 型/Type IV

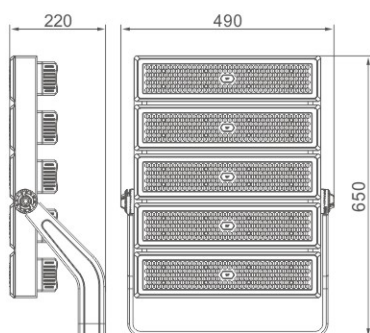

V 型/Type V

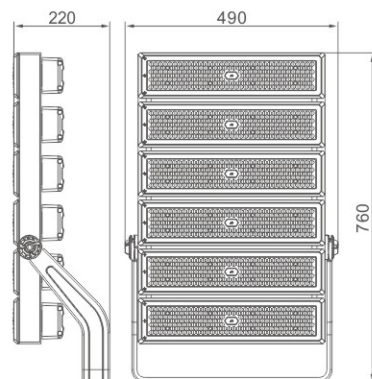

VI 型/Type VI

# HRFT-E 系列防水防尘防腐LED泛光灯(C型)

Series Weatherproof LED Floodlights (Type C)



Weatherproof Light Fittings  
防水防尘防腐灯具系列


## 技术参数/Technical Parametrers



|                              |                                                                                                                                     |           |           |           |            |            |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|------------|------------|
| 执行标准<br>Executive standards  | 中国GB标准 / 国际IEC标准 / 欧盟EN标准 / 北美标准<br>Chinese GB standards / International IEC standards / European EN standards / American standards |           |           |           |            |            |
| 额定电压<br>Rated voltage        | 100V~277V AC 50Hz/60Hz                                                                                                              |           |           |           |            |            |
| 环境温度<br>Ambient temperature  | -40℃~+55℃ (-60℃~+60℃可选/Optional)                                                                                                    |           |           |           |            |            |
| 防护等级<br>Degree of protection | IP66                                                                                                                                |           |           |           |            |            |
| 色温<br>Color temperature      | 5700K                                                                                                                               |           |           |           |            |            |
| 显色指数<br>CRI                  | Ra > 80                                                                                                                             |           |           |           |            |            |
| 壳体类型<br>Enclosure type       | I                                                                                                                                   | II        | III       | IV        | V          | VI         |
| 光源功率<br>Lamp power           | 200W                                                                                                                                | 400W      | 600W      | 800W      | 1000W      | 1200W      |
| 灯具光通量<br>Lamp luminous flux  | ≥ 26000lm                                                                                                                           | ≥ 52000lm | ≥ 78000lm | ≥ 93600lm | ≥ 130000lm | ≥ 156000lm |
| 重量<br>Weight                 | 5.5kg                                                                                                                               | 10.5kg    | 15.5kg    | 21.0kg    | 26.0kg     | 31.0kg     |
| 引入装置<br>Cable gland          | 配置3 × 1.5mm <sup>2</sup> 电缆 (长度1500mm)<br>Equipped with 3 × 1.5mm <sup>2</sup> cable (length is 1500mm)                             |           |           |           |            |            |




配光曲线 / Luminous intensity distribution  
cd/1000lm

标准 / Standard


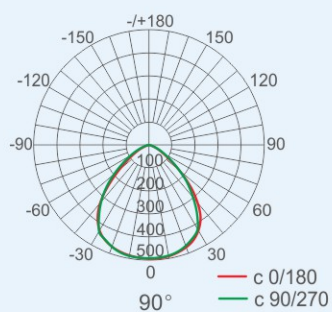


均光 / Symmetrical

可选 / Optional

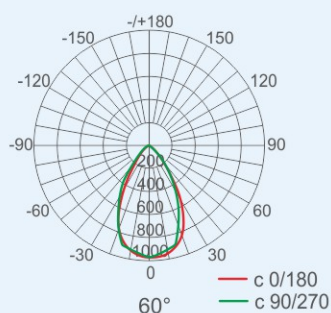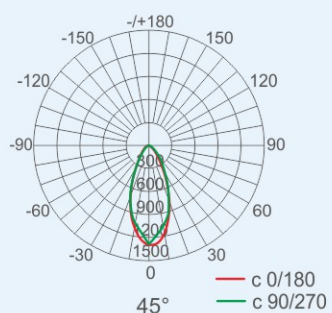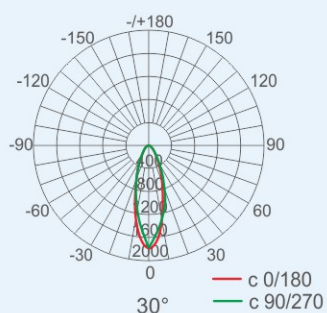

均光 / Symmetrical

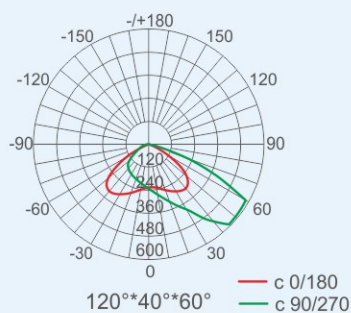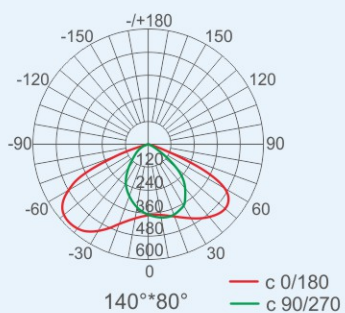

偏光 / Asymmetric



Weatherproof Light Fittings  
防水防尘防腐灯具系列